


WIL-TORQ 11000 TECHNICAL SPECIFICATIONS

SAFER • FASTER • BETTER

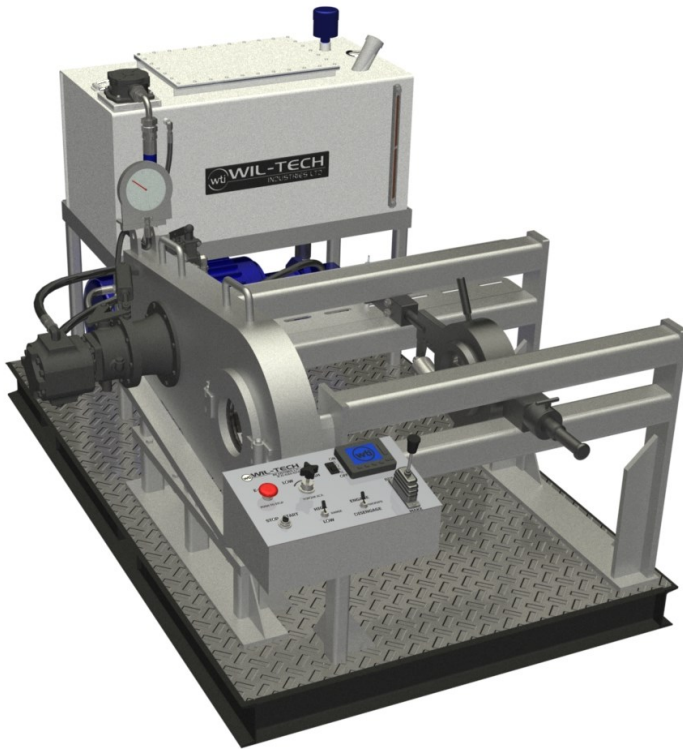

Specifications

- ◆ Max. Torque (low gear) - 11,200 ft.-lb.
- ◆ Max. Speed (high gear) - 76 rpm (@ 2200 ft.-lb. of torque)
- ◆ Range - 2-3/8" to 6-1/16" Diam.
- ◆ Hydraulic Power Supply - 2200 psi & 31 gpm
- ◆ Length - 107"
- ◆ Width - 73"
- ◆ Height - 62"
- ◆ Backup Travel Distance - 40"

WIL-TORQ 11000 BUCKING UNIT

With over 11,000 foot pounds of torque available to both make and break connections, plus two speed operation, you can have both speed and torque when you need it! Each unit is individually inspected after fabrication and is fully backed by a 1 year warranty. The complete hydraulic system was developed at Wil-Tech Industries, and the standard package includes the state of the art IQAN torque monitoring system. Highly qualified Wil-Tech technicians are ready to help you commission your unit, and are available around the clock to keep you running.

Please contact us with your custom equipment requirements!

Phone: (306) 634-6743