




WIL-TECH INDUSTRIES LTD.

THIS IS COST EFFICIENCY



THE ORIGINAL ALUMINUM PIPEWORK SYSTEM RELIABLE AND SAFE CONNECTION TECHNOLOGIES

COMPRESSED AIR - VACUUM - INERT GASES
DIAMETERS 1/2", 7/8", 1 1/2", 2", 2 1/2", 3", 4" AND 6"



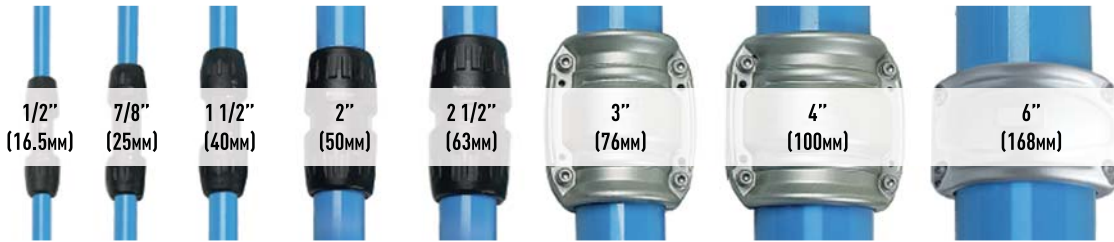


FAST, FLEXIBLE AND EASY TO MODIFY

GRIPPING RING
PUSH TO CONNECT

SNAP RING
QUICK-FIT CONNECTION

LUG & CLAMP
QUICK-FIT CONNECTION

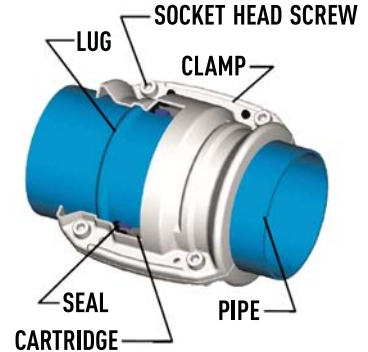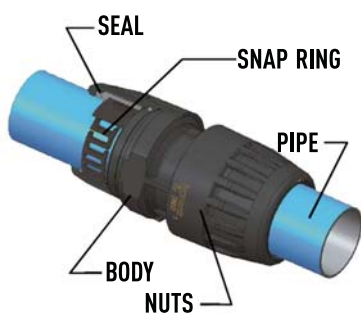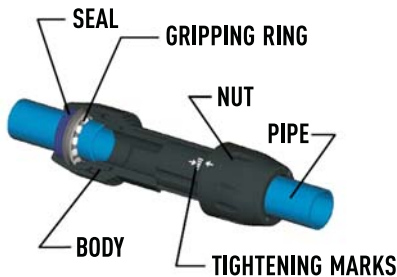

TRANSAIR® IS STRONG, LIGHTWEIGHT, MODULAR, CORROSION-RESISTANT, AND
NO HOT WORK TICKETS REQUIRED

CONTACT US TODAY!

SALES@WIL-TECH.CA

WWW.WIL-TECH.CA



WIL-TECH INDUSTRIES LTD.

THIS IS ENERGY EFFICIENCY



PARKER DOMNICK HUNTER OIL X

COMPRESSED AIR FILTERS, WATER SEPARATORS,
LOCKOUT VALVES & MODULAR LUBRICATORS, FILTERS / REGULATORS



MODULAR TOWER DESICCANT DRYERS

- FROM 32 SCFM TO 7,5000 SCFM
- -20, -40, -70°C DEWPOINTS
- HEATED AND VACUUM PURGE OPTIONS AVAILABLE



COALESCING FILTERS

- FROM 21 TO 2,219 SCFM AT NOMINAL CONDITIONS
- AO GRADE: 1 UM, 99.925% EFFICIENCY
- AA GRADE: 0.01 UM, 99.9999% EFFICIENCY
- ACS GRADE: OIL VAPOUR REMOVAL DOWN TO 0.003 MG/M3



WATER SEPARATORS

- FROM 21 TO 1,695 SCFM AT NOMINAL CONDITIONS
- >92% BULK WATER REMOVAL EFFICIENCY



MODULAR LUBRICATORS

- INTEGRAL 1/2", 3/4" OR 1" NPT PORTS
- PROPORTIONAL OIL DELIVERY OVER WIDE RANGE OF FLOWS
- FINGER TIP RATCHET CONTROL PRECISE OIL DRIP RATE



MODULAR HIGH-FLOW FILTERS / REGULATOR

- P32 COMPACT, P33 STANDARD, & P3Y HIGH-FLOW
- FROM 85 SCFM TO 369 SCFM
- -10°C TO +65.5°C OPERATING TEMPERATURE



FLV PNEUMATIC LOCKOUT VALVES

- 1/2" TO 2" NPT PIPE SIZES
- INLINE OR SURFACE MOUNTABLE
- BUILT IN PORT FOR PRESSURE VERIFICATION

306-634-6743
ESTEVAN

306-721-1559
REGINA

306-668-1900
SASKATOON